



HUMICAP® Humidity and Temperature Probe HMP110



Features

- Miniature-size humidity transmitter
- Low power consumption and fast start-up for battery powered applications
- Measurement range: 0 ... 100 %RH; -40 ... +80 °C
- Cable detachable with standard M8 quick connector
- IP65 metal housing
- Optional RS-485 digital output supports Modbus RTU
- ±1.5 %RH measurement accuracy (0 ... 90 %RH)

HMP110 is a trouble-free and cost-effective humidity transmitter with high accuracy and good stability. It is suitable for volume applications or integration into other manufacturers' equipment. HMP110 is also suitable for glove boxes, greenhouses, fermentation and stability chambers, data loggers, and incubators.

Benefits

- Latest generation HUMICAP® 180R sensor for best stability and high chemical tolerance
- HMP110R replacement probe service available for easy maintenance
- Comes with calibration certificate
- Optional dew point calculation

Easy Installation

The probe cable has a screw-on quick connector for easy installation. Different cable lengths and accessories are available.

Low Current Consumption

HMP110 is suitable for battery-powered applications because of its very low current consumption. It also has a fast start-up time.

Several Outputs

The temperature measurement is a standard feature, dew point measurement is optional. Three standard voltage outputs are available. An optional RS-485 output with Modbus support is also available.

Robust Design

The stainless steel body of HMP110 is classified as IP65. Thus, it survives rough conditions. HMP110 has high chemical tolerance because of the HUMICAP 180R sensor.

Easy Maintenance

Maintaining measurement traceability is easy using the HMP110R replacement probe. We send you a replacement probe, you detach the old probe and send it back to us. In this way the measurement is available at all times without interruptions.

Technical Data

Measurement Performance

Relative Humidity

Measurement range	0 ... 100 %RH
Accuracy (incl. Non-Linearity, Hysteresis and Repeatability):	
Temperature range	0 ... +40 °C
0 ... 90 %RH	±1.5 %RH
90 ... 100 %RH	±2.5 %RH

Temperature range	-40 ... 0 °C, +40 ... +80 °C
0 ... 90 %RH	±3.0 %RH
90 ... 100 %RH	±4.0 %RH

Factory Calibration Uncertainty (+20 °C):	
0 ... 90 %RH	±1.1 %RH
90 ... 100 %RH	±1.8 %RH

Humidity sensor	Vaisala HUMICAP® 180R
Stability	±2 %RH over 2 years

Temperature

Measurement range	-40 ... +80 °C
-------------------	----------------

Accuracy over Temperature Range:	
0 ... +40 °C	±0.2 °C
-40 ... 0 °C, +40 ... +80 °C	±0.4 °C

Temperature sensor	Pt1000 RTD Class F0.1 IEC 60751
--------------------	---------------------------------

Dew Point

Measurement range	-40 ... +80 °C
-------------------	----------------

Accuracy (incl. Non-Linearity, Hysteresis and Repeatability):	
Temperature range	0 ... +40 °C
When dew point depression < 15 °C	±1 °C
When dew point depression 15 ... 25 °C	±2 °C

Temperature range	-40 ... 0 °C, +40 ... +80 °C
When dew point depression < 15 °C ¹⁾	±2 °C

Analog Outputs

Accuracy at 20 °C	±0.2 % of FS
Temperature dependence	±0.01 % of FS/°C

¹⁾ Dew point depression = ambient temperature - dew point

Operating Environment

Operating temperature	-40 ... +80 °C
EMC compliance	EN 61326-1, industrial environment

Mechanical Specifications

IP rating	IP65
Body thread	M12x1 / 10 mm
Cable connector	4-pin M8 (IEC 60947-5-2)

Materials

Body	Stainless steel (AISI 316)
Grid filter	Chrome coated ABS plastic
Cable	Polyurethane or FEP

Weight

Probe	17 g
Probe with 0.3 m cable	28 g

Inputs and Outputs

Power consumption	1 mA average, max. peak 5 mA
-------------------	------------------------------

Operating Voltage¹

With 1 V / 2.5 V output	5 ... 28 VDC
With 5 V output	8 ... 28 VDC
With loop power converter	8 ... 28 VDC
With digital output	5 ... 20 VDC

Start-Up Time

HMP110 probes with analog output	4 s at operating voltage 13.5 ... 16.5 VDC 2 s at other valid operating voltages
HMP110 with digital output	1 s

Outputs

2 channels	0 ... 1 VDC / 0 ... 2.5 VDC / 0 ... 5 VDC / 1 ... 5 VDC
------------	--

1-channel loop-power converter (separate module, compatible with humidity accuracy only)	4 ... 20 mA
--	-------------

Digital output (HMP110 with digital output)	RS-485 2-wire half duplex, supports Modbus RTU
---	--

External Loads

0 ... 1 V	R _L min 10 kΩ
0 ... 2.5 V / 0 ... 5 V	R _L min 50 kΩ

¹⁾ (Use Lowest Available Operating Voltage to Minimize Heating)

Spare Parts and Accessories


4 ... 20 mA loop power converter	UI-CONVERTER-1CB
Mounting bracket for converter	225979
Plastic M12 installation nuts, pair	18350SP
USB cable for PC connection	219690
Probe mounting clamp set, 10 pcs	226067
Probe mounting flange	226061

Sensor Protection

Plastic grid	DRW010522SP
Membrane filter	DRW010525SP
Stainless steel sintered filter	HM46670SP
PTFE sintered filter	DRW244938SP

Connection Cables

Standard 0.3 m	HMP50Z032SP
Standard 3 m	HMP50Z300SP
80 °C 1.5 m	225777SP
80 °C 3 m	225229SP
180 °C 3 m FEP	226902SP
Connection cable for HM70	219980

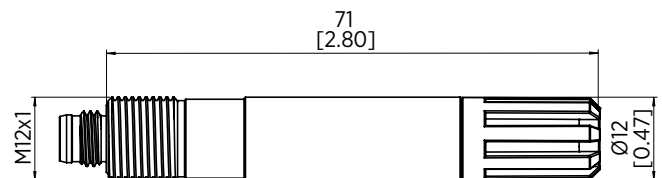

Dimensions in mm (inches)



Published by Vaisala | B210852EN-J © Vaisala 2017



www.vaisala.com

All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. Any reproduction, transfer, distribution or storage of information contained in this document is strictly prohibited. All specifications — technical included — are subject to change without notice.